




MacBook Air 13" Early 2015 Display Screws Replacement

prereq for removing IO board side display screws and heatsink screw

Written By: iRobot

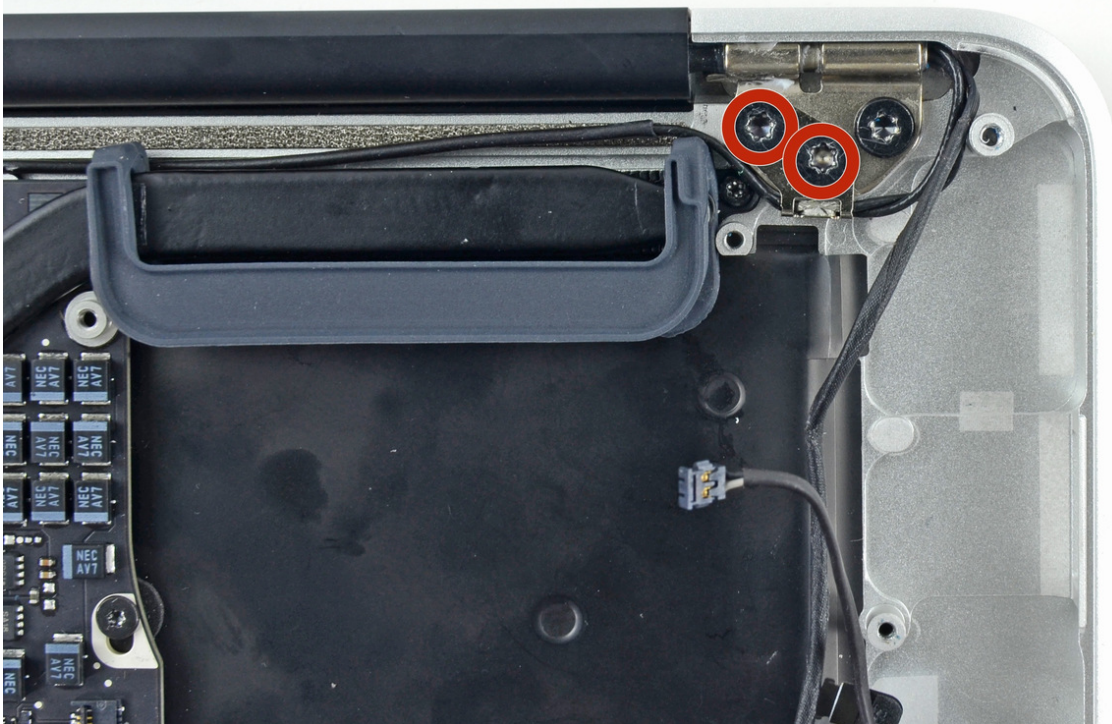

INTRODUCTION

prereq for removing IO board side display screws and heatsink screw

Step 1 — Display Screws



- Remove the two 5.6 mm T8 Torx screws securing the antenna cable retainer on the left display hinge to the upper case.

Step 2



- Push the antenna cable retainer out of the way and remove the single 3 mm T5 Torx screw securing the end of the heat sink to the upper case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-20 01:23:04 AM.